

APV Kompakva VXB50+

District heating unit with 50 litres storage tank



Product description

The APV Kompakva VXB50+ is a complete district heating unit offering optimum safety and comfort. A plate heat exchanger heats central heating water as well as domestic water when combined with the storage tank. The simple and extremely compact design makes the APV Kompakva VXB50+ the smallest unit of its type on the market.


- Smallest on the market
- Low operating costs
- Low power consumption
- Excellent cooling

Application

The APV Kompakva VXB50+ can be connected directly to the district heating network at a maximum flow temperature of 130°C. Operating conditions depend upon the differential pressure and the temperature of the district heating water.

The graph illustrates operating conditions without the need for a differential pressure controller. The use of a differential pressure controller set at a maximum of 40 kPa is recommended for levels outside the green area.

The APV Kompakva VXB50+ is especially suitable for remote areas of the district heating network with reduced capacity. Power consumption at maximum output is 10 kW. The APV Kompakva VXB50+ is designed for single-family installations with no bath tub.



Components and function

The APV Kompakva VXB50+ consists of the following main components: An APV multifunctional block, an APV plate heat exchanger in two sections, two thermostatic valves, a differential pressure controller (for heating), two circulation pumps, an expansion tank, and a storage tank.

APV multifunctional block

The multifunctional block functions as a pipe arrangement, cover, back panel and sensor pocket. The special channel design combined with the position of the sensor in the multifunctional block accelerates the closing function of the valve. This contributes to the low energy consumption at idle and reduces operating costs.

APV plate heat exchanger

The newly developed plate coupling (two sections in one plate heat exchanger) means that the same plate heat exchanger can be used for both domestic water and central heating, thereby reducing the pipe arrangement and space requirements.

Differential pressure controller

The differential pressure controller ensures optimum operating conditions for the thermostatic valve, which controls the central heating temperature.

Circulation pump

The pump on the central heating circuit circulates the wa-

ter through the central heating circuit and the plate heat exchanger. The extremely energy-efficient pump features a built-in frequency converter that reduces power consumption by as much as 40% compared to traditional pumps, and eliminates noise.

Temperature control

The APV Kompakva VXB50+ features temperature control for both domestic water and central heating. The domestic water thermostatic valve ensures a consistent tap water temperature. When the district heating unit is not in use, the thermostatic valve ensures a suitable idle temperature. The central heating thermostatic valve ensures a consistent central heating water temperature.

Storage tank

The stainless steel storage tank is pre-heated. The water is heated by a storage tank pump and heat exchanger. The advantages of using a storage tank instead of a traditional hot water tank are the absence of a heating coil and much smaller installation dimensions. The stainless steel storage tank requires no corrosion protection.

Storage tank pump

The storage tank pump maintains domestic water temperature in the storage tank by checking the temperature in the tank at regular intervals during start-up. The operation temperature is factory set at 40°C, and can be adjusted in the pump display.

Balancing valve

The balancing valve determines the tank emptying time.

Domestic water circulation

The APV Kompakva VXB50+ is ready-fitted for domestic water circulation installations, ensuring hot water as soon as the tap is turned on, no matter how far the tap is from the water heater. Circulation pipes can be connected to the built-in 1/2" end caps – or outside the unit.

Central heating system safety equipment

The central heating unit is fitted with a safety valve and an expansion tank.



Domestic water system safety equipment

The domestic water system is fitted with a safety valve.

Mounting

The APV Compakva VXB50+ is designed for wall-mounting. Fitting is simple and the positioning of all pipe connections at pipe bracket distance from the wall facilitates a neat pipe arrangement.

Packaging

The APV Compakva VXB50+ comes in shock-resistant packaging.

Technical data and specifications


Domestic water system				
APV Type	Domestic heating temperature	60°C / 25°C		
	Domestic water temperature	10°C / 45°C		
	Total pressure loss (DH) kPa	Capacity kW	Domestic water l/h	No. of houses
Compakva VXB50+	25	10	246	1

Central heating circuit				
APV Type	Domestic heating temperature	70°C / 40°C		
	Radiator circle	60°C / 35°C		
	Total pressure loss (DH) kPa	Capacity kW	Radiator circle l/h	No. of houses
Compakva VXB50+	25	13	453	1

Measurements (without cabinet)				
APV Type	Width mm	Height mm	Depth mm	Weight kg
Compakva VXB50+	550	1350	360	40


Pressure level	PN10 (special model PN16)
Max temp.	130°C
Connections	3/4"
Materials	Red brass/stainless steel AISI 316

Flow diagram

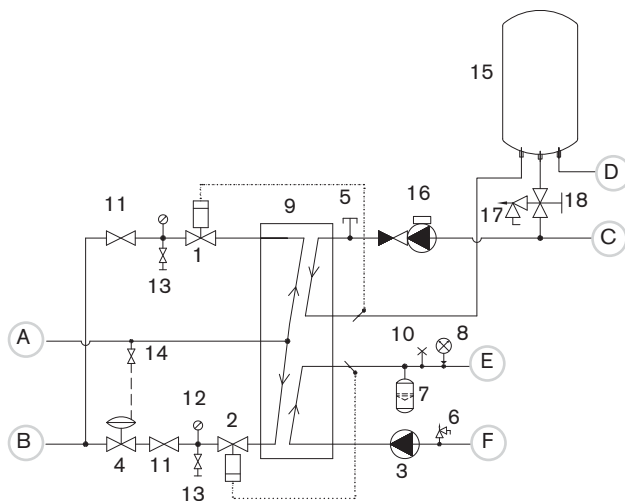

- | | |
|---|---|
| 1. Thermostatic valve, domestic water | 10. Air vent |
| 2. Thermostatic valve, heat | 11. Shut-off valve |
| 3. Pump | 12. Thermometer |
| 4. Differential pressure controller | 13. Drain |
| 5. 1/2" end cap for possible circulation pipe | 14. Mini ball valve |
| 6. Safety valve, heating | 15. Storage tank (50 liter) |
| 7. Expansion tank | 16. Storage tank pump with non-return valve |
| 8. Mano thermometer | 17. Safety valve, domestic water |
| 9. APV plate heat exchanger | 18. Pipe regulating valve |

Connections seen from above

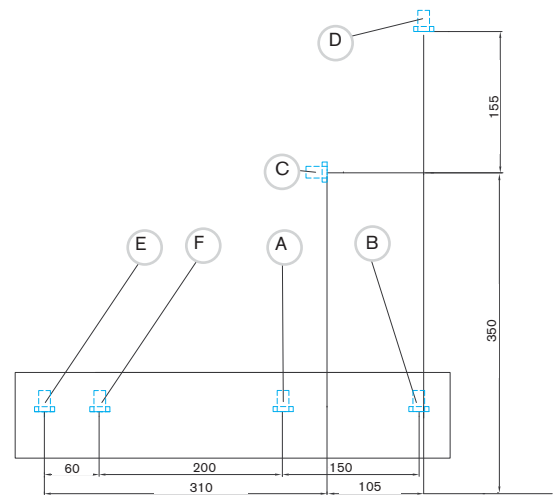

The measurements on the drawing are stated in mm. The distance from the center of the connections to the wall is 44 mm

- A District heating, flow forward
- B District heating, flow return
- C Cold domestic water, inlet
- D Hot domestic water, outlet
- E Radiator, forward
- F Radiator, return



Your local contact:



APV, An SPX Brand
Platinvej 8
8000 Kolding
Phone: +45 70 278 444 Fax: +45 70 278 445
Email: heat.europe@apv.com

For more information about our worldwide locations, approvals, certifications, and local representatives, please visit www.apv.com.

SPX Corporation reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing.

Issued: 02/2009 1000-04-02-2009-GB

Copyright © 2005 SPX Corporation