



In-Line Filter

APPLICATION

APV plate heat exchangers can be equipped with a filter insert in the inlet boss.

The filter insert cannot be used to replace the standard system filter where larger filtering quantities are required.

DESCRIPTION

The filter insert consists of a cylindrical pipe connection made of perforated stainless steel sheet. It is inserted into the inlet port of the plate heat exchanger from the follower blanked port flange.

The length of the filter is adapted to the actual number of plates.

CLEANING

For inspection and/or cleaning the filter flange is dismantled and the filter is taken out.

DATA


Plate heat exchanger type:

Port dim: -80- to -350- stainless steel.

Filter material: AISI 316L.

Holes size: Ø 2.5 mm.

Open: 46%.

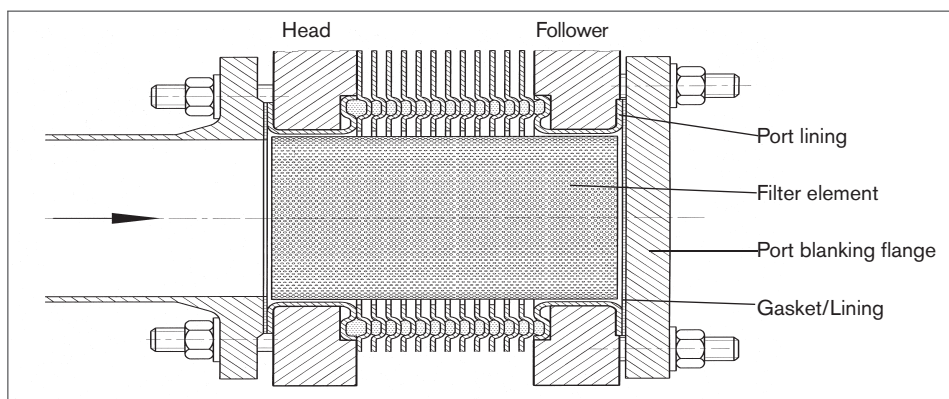

APV, An SPX Brand
Platinvej 8, 6000 Kolding, Denmark
Phone: +45 70 278 444 Fax: +45 70 278 445

For more information about our worldwide locations, approvals, certifications, and local representatives, please visit www.apv.com.

SPX Corporation reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing.

Issued: 08/2008 1105-01-08-2008-GB

Copyright © 2008 SPX Corporation