



Sanitary Centrifugal Pumps




Ws+ Series - 60Hz Curve Book



NOTE: _____

Speed: **n=3500 -1 60 Hz**
 Impeller: **Max.dia. 5.6 inch**
 (142 mm)
Min.dia. 3.7 inch
 (95 mm)
 Pump inlet: **2.5 inch** (63,5 mm)
 Pump outlet: **2.0 inch** (51 mm)




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

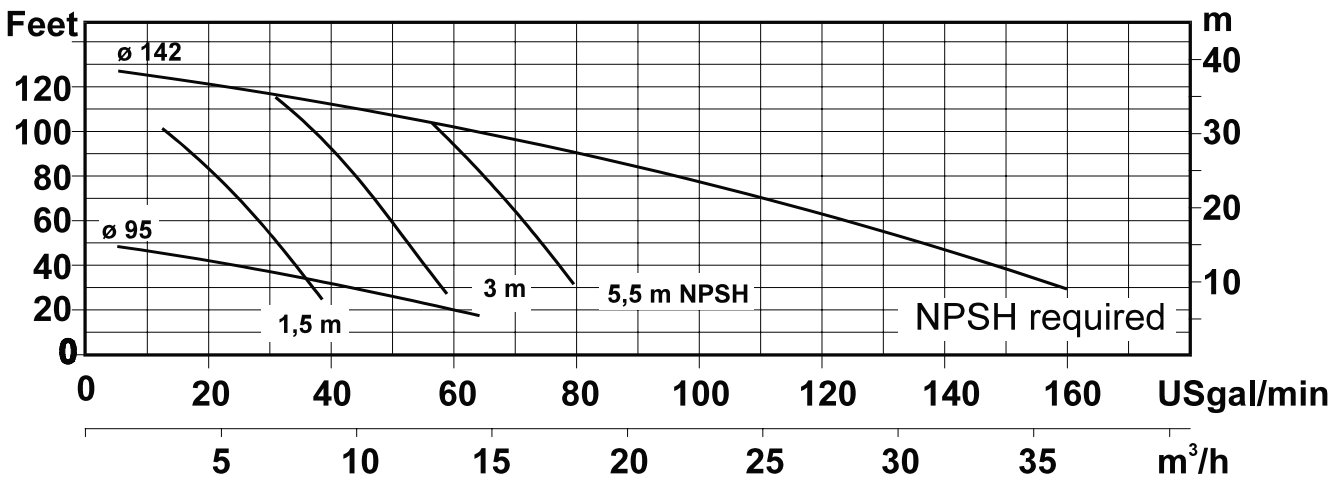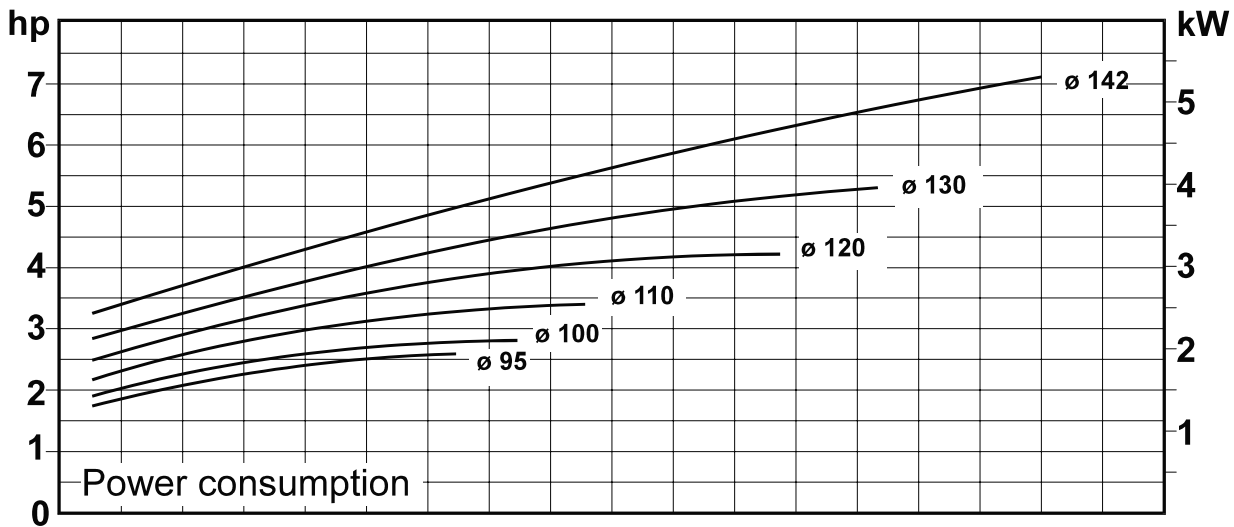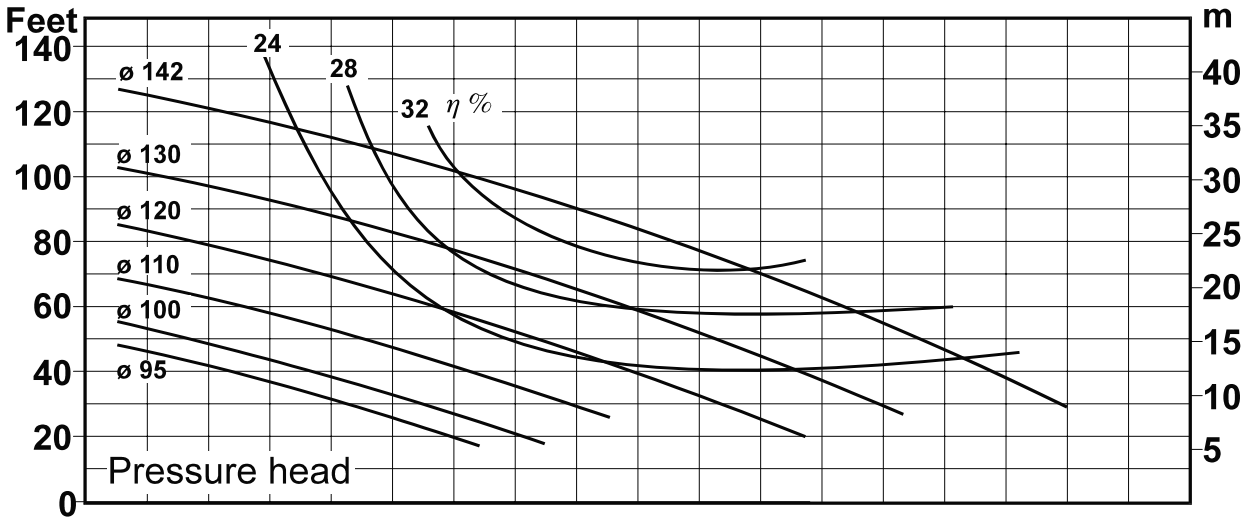

NOTE: _____

Speed: **n=3500 -1 60 Hz**
 Impeller: **Max.dia. 6.9 inch (175 mm)**
 Min.dia. 4.9 inch (125 mm)
 Pump inlet: **2.5 inch (63,5 mm)**
 Pump outlet: **2.0 inch (51 mm)**




Performance data refer to water at 68°F
 Permissible tolerance ±5%

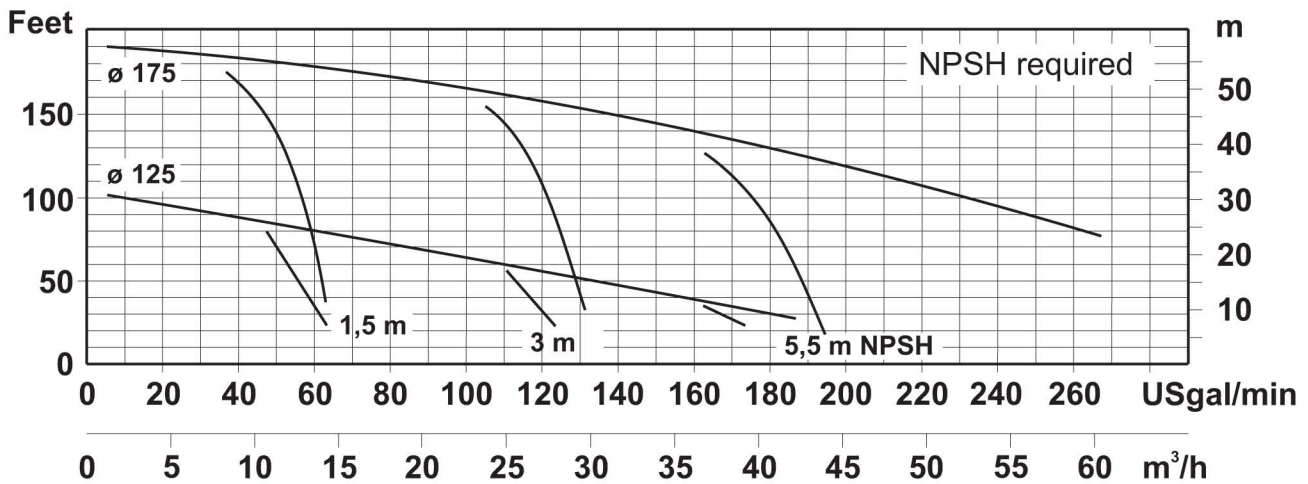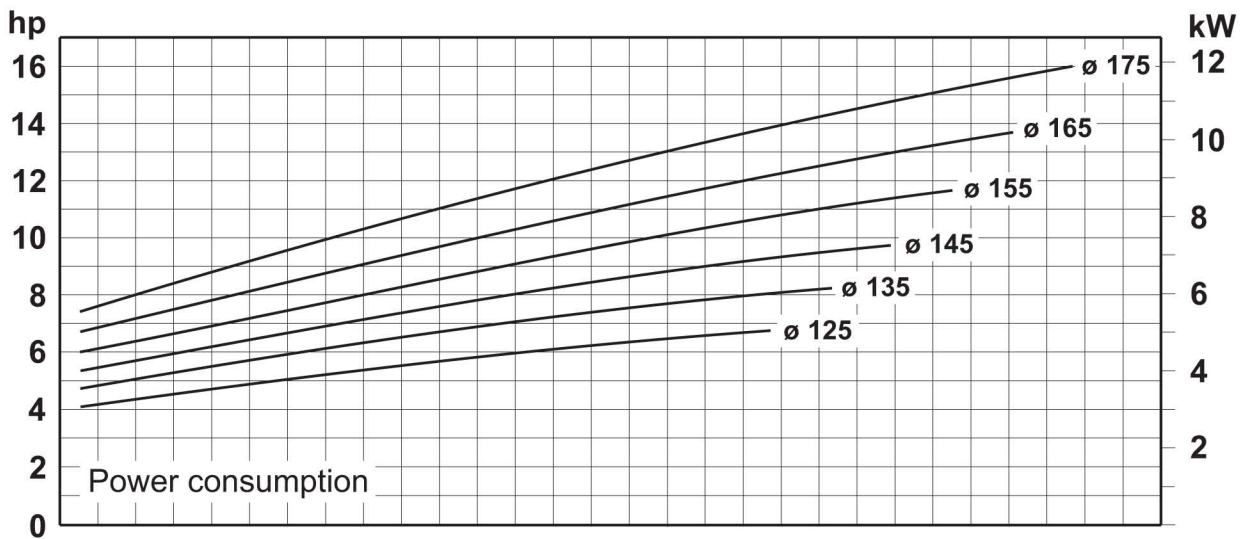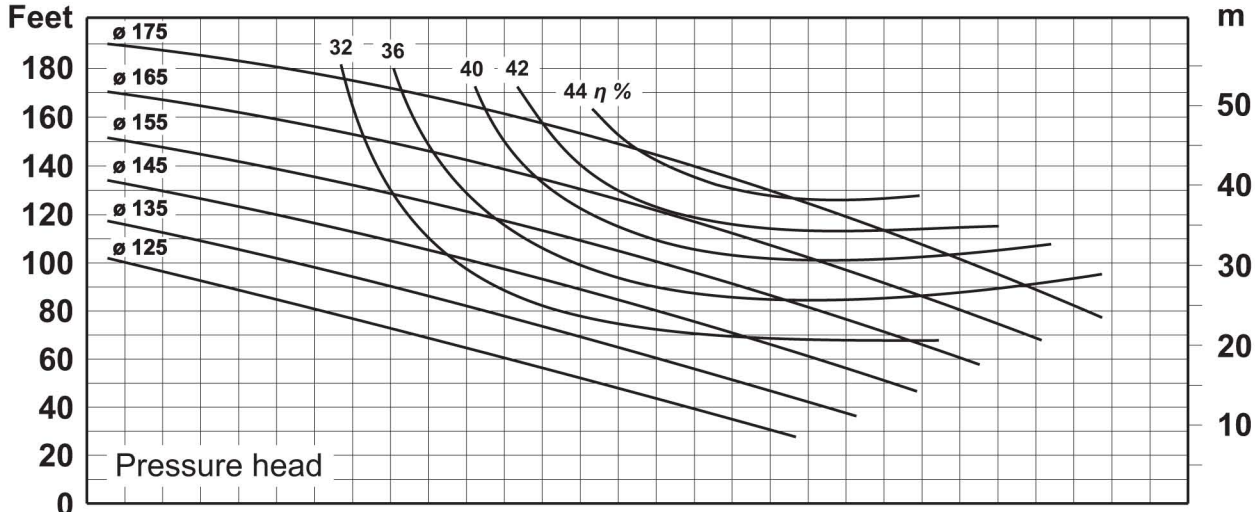

NOTE: _____

Speed: **n=3500 -1 60 Hz**
 Impeller: **Max.dia. 8.7 inch (220 mm)**
 Min.dia. 6.3 inch (160 mm)
 Pump inlet: **3.0 inch (76 mm)**
 Pump outlet: **2.0 inch (51 mm)**

Performance data refer to water at 20°C
 Permissible tolerance ±5%

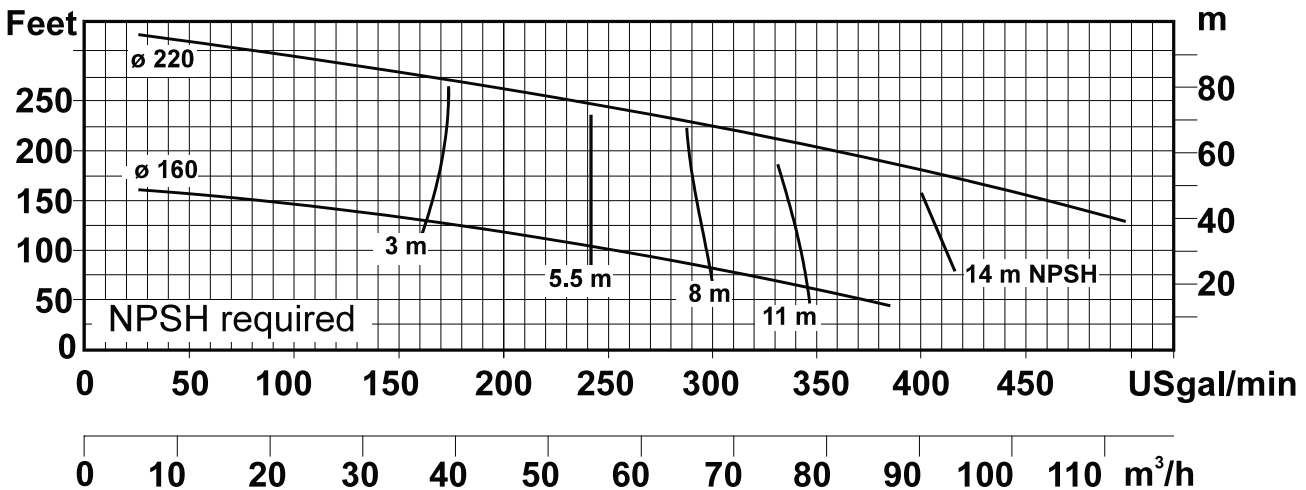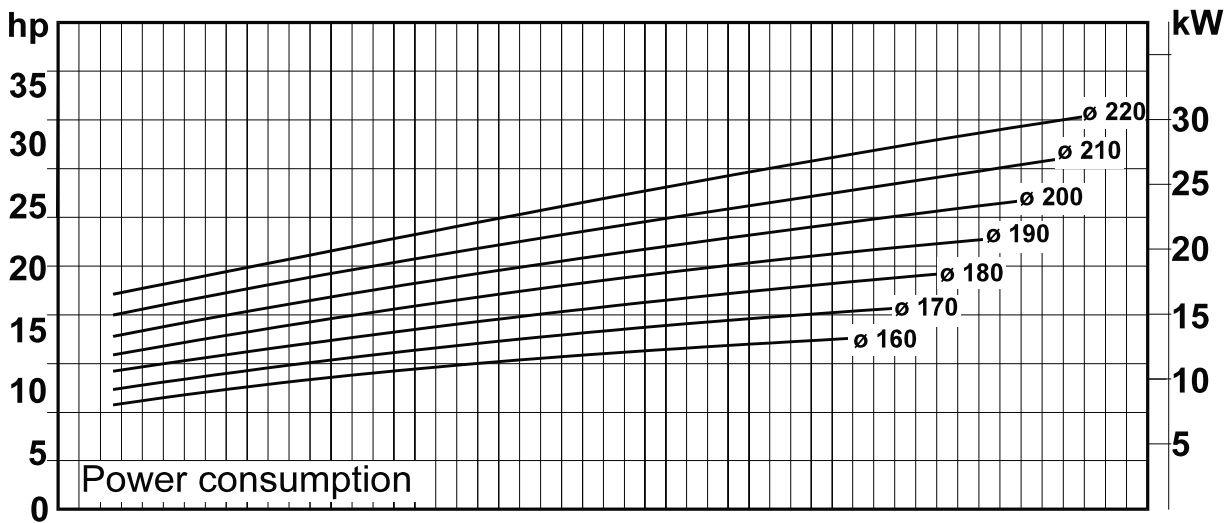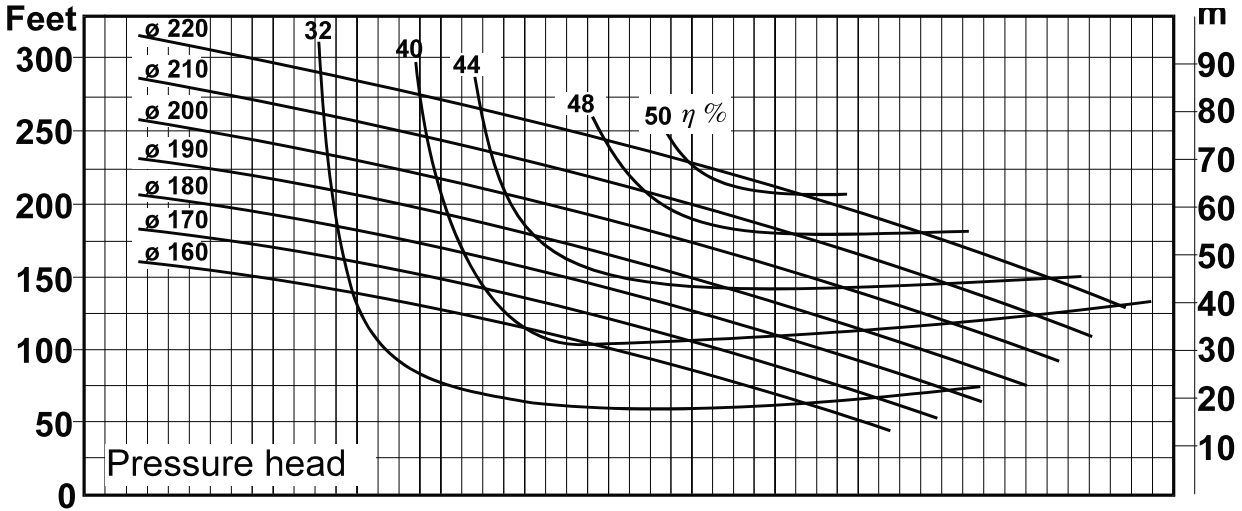



Your local contact:



SPX Flow Technology
Phone: (888) 278-4321
Email: answers.us@apv.com

For more information about our worldwide locations, approvals, certifications, and local representatives, please visit www.apv.com.

SPX Corporation reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing.

Issued: 12/2010 7022

Copyright © 2010 SPX Corporation